

GLOBAL HEADQUARTERS

Ashland LLC

50 East RiverCenter Blvd.
Covington, KY 41012-0391 U.S.A.
Tel: +1 859 815 3333

REGIONAL CENTERS

North America — Dublin, OH USA
Tel: +1 614 790 3333

Europe — Barcelona, Spain
Tel: +34 93 206 5120

India — Navi Mumbai
Tel: +1 800 209 2475

Asia Pacific — Shanghai, P.R. China
Tel: +86 21 2402 4888

Latin America — Araçariquama, Brazil
Tel: +55 11 4136 6477

derakane.com

ashland.com

® Registered trademark, Ashland or its subsidiaries, registered in various countries
™ Trademark, Ashland or its subsidiaries, registered in various countries
© 2017, Ashland / PC-9011.3

 ashland.com / efficacy usability allure integrity profitability™

The information contained in this brochure and the various products described are intended for use only by persons having technical skill and at their own discretion and risk after they have performed necessary technical investigations, tests and evaluations of the products and their uses. Certain end uses of these products may be regulated pursuant to rules or regulations governing medical devices, drug uses, or pesticidal or antimicrobial uses. It is the end user's responsibility to determine the applicability of such regulations to its products.

All statements, information, and data presented herein are believed to be accurate and reliable, but are not to be taken as a guarantee of fitness for a particular purpose, or representation, express or implied, for which seller assumes legal responsibility. No freedom to use any patent owned by Ashland, its subsidiaries, or its suppliers is to be inferred.

Disclaimer: Notice: All precautionary labels and notices should be fully read and understood by all supervisory personnel and employees before using. For additional safety and health information, contact Ashland. Purchaser has the responsibility for determining any applicability of a compliance with federal, state or local laws and/or regulations involving use, particularly in making consumer products.

The information contained herein is correct to the best of our knowledge. The recommendations or suggestions contained in this bulletin are made without guarantee or representation as to results. We suggest that you evaluate these recommendations and suggestions in your own laboratory prior to use. Our responsibility for claims arising from breach of warranty, negligence, or otherwise is limited to the purchase price of the material. Freedom to use any patent owned by Ashland or others is not to be inferred from any statement contained herein.



When it's your reputation on the line, you can rely on ours.

—
Flue gas desulfurization (FGD) applications



Derakane™ epoxy vinyl ester resins used in FGD applications

Ductwork

Ductwork made from Derakane 510C-350 resin or Derakane 510B resin offers superior corrosion resistance. The ductwork also can withstand temperature excursions up to 315°C (600°F). They are lightweight and do not require insulation.

Cooling Towers


Pultruded structural profiles based on Aropol isophthalic polyester resins are anticipated to last more than twice as long as wood in cooling tower applications. Derakane 510B and Derakane 510C resin provides good performance in fan shrouds and other exterior components where fire retardance is required. FRP requires little or no maintenance over its life span and is not subject to internal deterioration or biological attack.

Stack Liners

Made from Derakane 510C-350 resin or Derakane 510B resin, FRP stack liners are considerably less expensive than C-276 clad steel.

Demister Blades

Blades made from Derakane 510C-350 resin, Derakane 470-300 resin have superior corrosion resistance. Blades also are lightweight. FRP demister blades are easy to install and will not become brittle like thermoplastic materials.

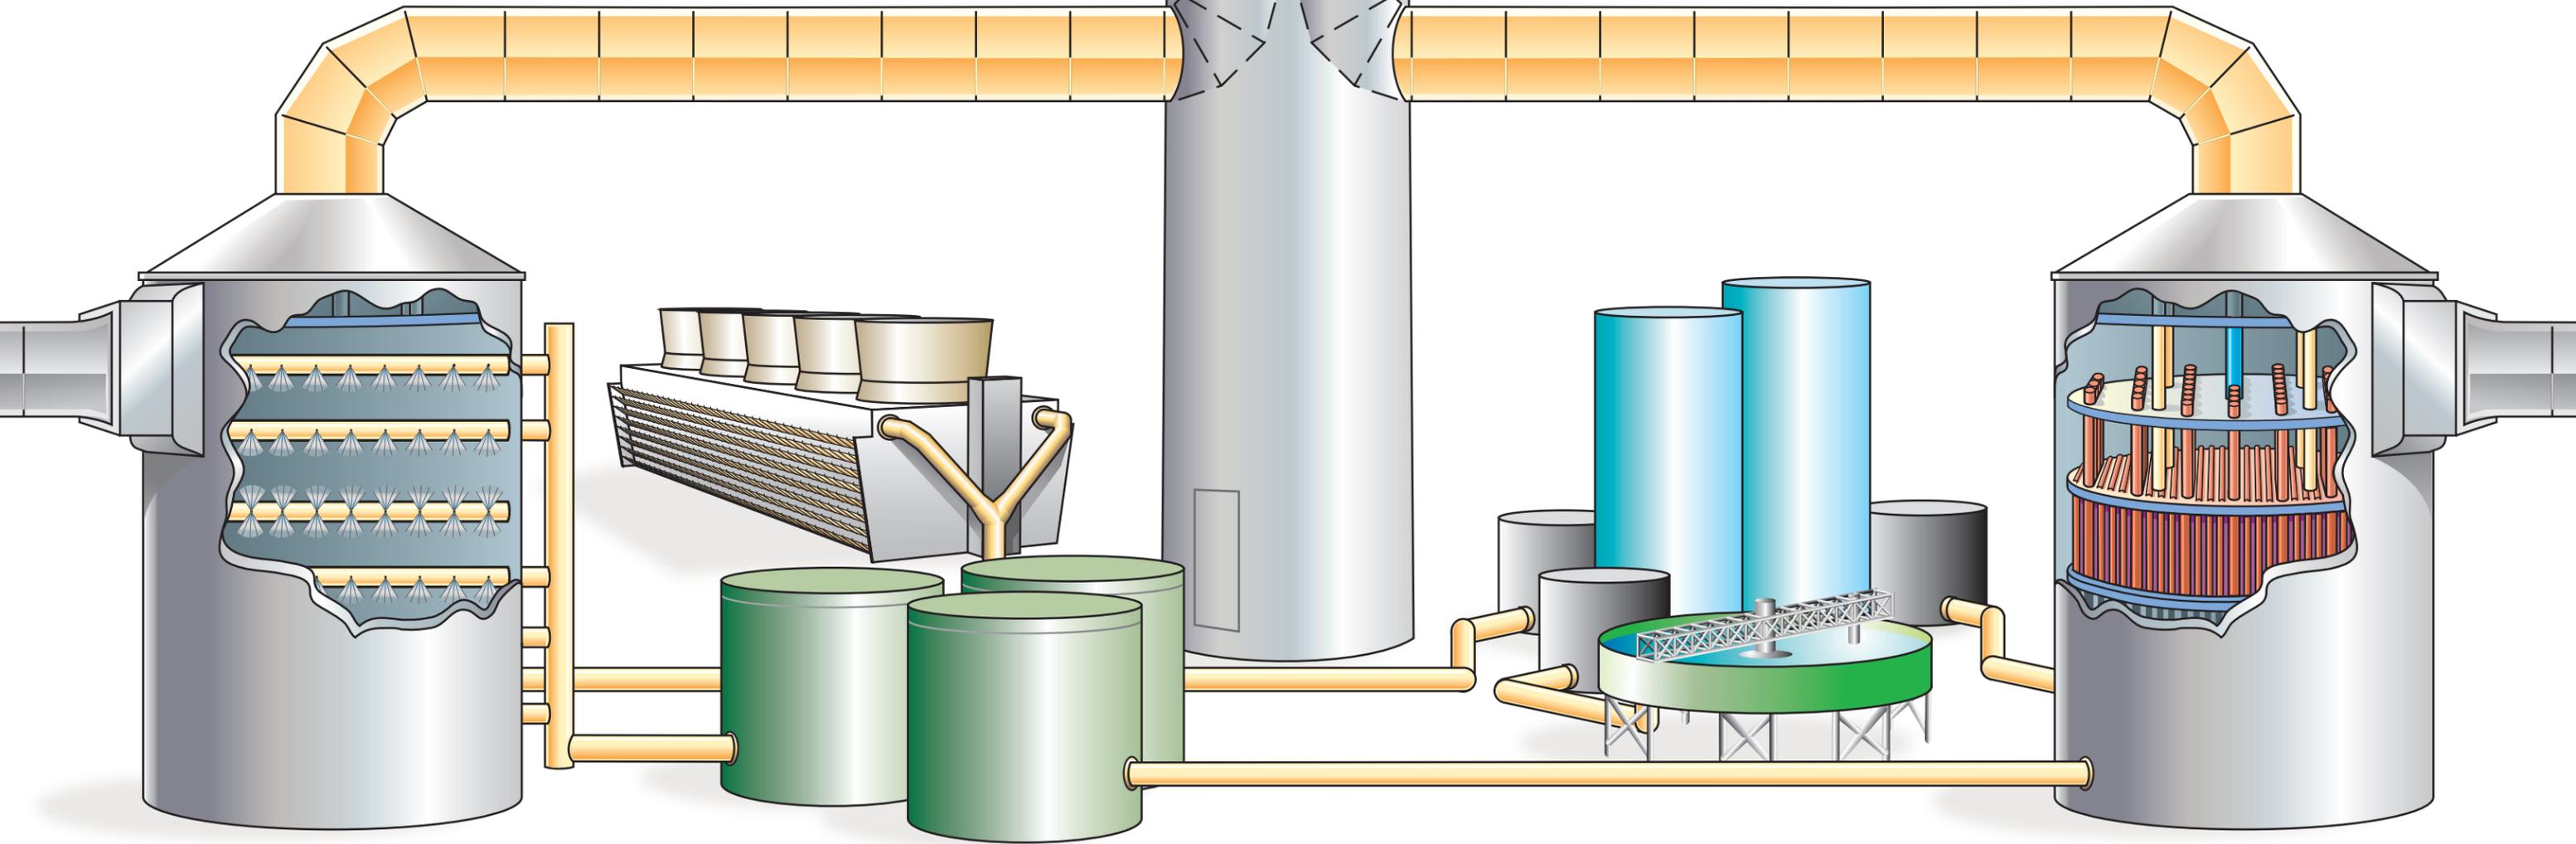

Scrubbers

Shells and internals in the scrubber are made from Derakane 411-350 resin and Derakane 510C-350 resin. Ashland products have superior corrosion resistance and excellent

abrasion resistance.

Scrubbing equipment made from these resins requires less maintenance than acid brick or rubber lining, and is much less expensive than C-276 clad steel.

Slurry Tanks and Piping

Slurry tanks and piping made from Derakane 411-350 resin and Derakane 510C-350 resin offer excellent abrasion resistance. FRP slurry tanks are much lighter than metal, and are less expensive than rubber-lined steel.

Process Water Tanks and Piping

When made from isophthalic polyester resins and Aropol resins, process water tanks and piping are very economical and can handle process water up to 150°F.

Equipment made from Derakane 411-350 resin can handle process water up to 180°F.